(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 6 January 2005 (06.01.2005)

PCT

(10) International Publication Number WO 2005/002229 A3

(51) International Patent Classification7: 7/64, H03M 13/35

H04N 7/24,

(21) International Application Number:

PCT/IB2004/051037

(22) International Filing Date:

28 June 2004 (28.06.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 60/483,792

30 June 2003 (30.06.2003)


- (71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS, N.V. [NL/NL]: Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): GADDAM, Vasanth, R. [IN/US]; P.O. Box 3001, Briarcliff Manor, New York 10510-8001 (US). BIRRU, Dagnachew [ET/US];

P.O. Box 3001, Briarcliff Manor, New York 10510-8001 (US).

- (74) Common Representative: KONINKLIJKE PHILIPS ELECTRONICS, N.V.; c/o Gathman, Laurie P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN. CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI. GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM. ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: RECEIVER AND PACKET FORMATTER FOR DECODING AN ATSC DTV SIGNAL

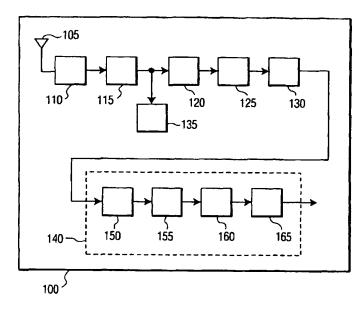

(57) Abstract: A packet formatter for use in a television receiver capable of receiving a dual bitstream signal comprising a standard stream compatible with the Advanced Television Systems Committee (ATSC) standard and a robust stream. The packet formatter comprises: 1) a first processing block capable of receiving the dual bitstream signal and removing therefrom header bits and parity bits associated with the robust stream to thereby produce a first output signal; and 2) a second processing block capable of receiving the first output signal and removing therefrom duplicate bits associated with the robust stream to thereby produce a second output signal that is output from a data path output of the packet formatter.





SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,

- BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

Published:

- with international search report
- (88) Date of publication of the international search report: 12 May 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.